



DARKLITE™

THE PHOSPHORESCENT HEAT TRANSFER FILM FOR A POWERFUL GREEN GLOW-IN-THE-DARK EFFECT

Looking for a glow-in-the-dark personalisation solution? Darklite is a soft touch and phosphorescent PU film that will provide a great green visual effect to all your creations in dark environments.

Special event costumes




How it looks in a standard environment



How it looks in dark environment

Product description

- ✓ Great to reach a great green luminescent effect.
- ✓ Glows in dark environments after being exposed to the light.
- ✓ Charged by natural and artificial light.
- ✓ Very soft touch.
- ✓ White matte finish.

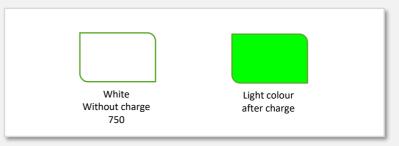

Application key points

- ✓ Very easy to cut.
- ✓ Allows very small design to power up the glow in dark effect.
- \checkmark Very easy to weed \rightarrow saves production time.
- ✓ Very strong adhesive backing that allows repositioning the design after weeding.

Usage benefits

✓ Ideal for decorating special events costumes, or accessories that need to stand out in the dark.

SPECIFICATIONS

Medium

| Composition | Average Thickness | Carrier | Dimensions |
|--------------------------------|-------------------|----------------------------------|--------------|
| Phosphorescent Polyurethane | 130 µm | Adhesive & Transparent Polyester | 50 cm x 10 m |

APPLICATION INSTRUCTIONS

| Applies on | Cutting | Application Temp. & Duration |
|--|-------------------------|---------------------------------|
| Cotton Polyester Acrylic Cotton/Polyester blends without repellent treatment | Use a Flex Blade 45° | 150°C – 15 s 302°F – 15 s |
| Pressure | Peeling | |

Cold

Step 1 – Cutting

Set up the cutting of your heat transfer film in mirror mode and use a standard flex blade of 45° .

Step 2 – Weeding

Remove the excess of material (easy weeding).

Step 3 – Application

Position your design on the textile and press it with a Sefa DUPLEX/ROTEX or equivalent at $150^{\circ}C/302^{\circ}F$ for 15 seconds, with a medium pressure.

We do recommend the use of a silicone paper to protect the designs and the textile during the application.

Step 4 – Peeling

Peel the material while cold.

NOTE: We highly recommend you to perform tests before launching a production.

CARE AND MAINTENANCE RECOMMENDATIONS

| Washing | 9 | Ironing | Tumble -dry | Dry cleaning |
|-------------------|-----|---------------------------|----------------|-----------------|
| Up to 40°C/104 | ŀ⁰F | On reverse side only | Yes | Yes |
| Storage life | S | torage Tempe Lightning | Position | |
| | | | | |

Care and maintenance:

✓ Always respect the garments' instructions.

- ✓ Wait 24 hours after the application before the first wash.
- ✓ Avoid the use of aggressive products.

Washing recommendations:

- \checkmark Respect the textile recommendations.
- \checkmark Preferably inside out to extend the design's life.
- ✓ Do not bleach.